



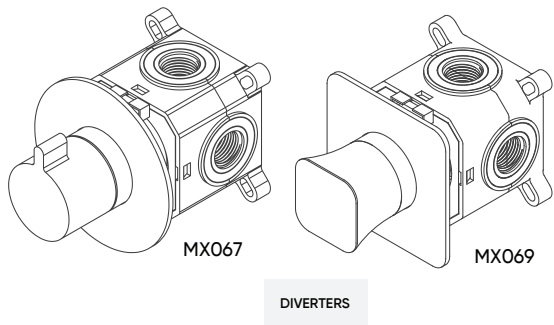


INSTALLATION MANUAL

Product name: **TWO-WAY CONCEALED SHOWER MIXERS & DIVERTERS**
Model number: HAT-MX066 & MX068 | HAT-MX067 & MX069

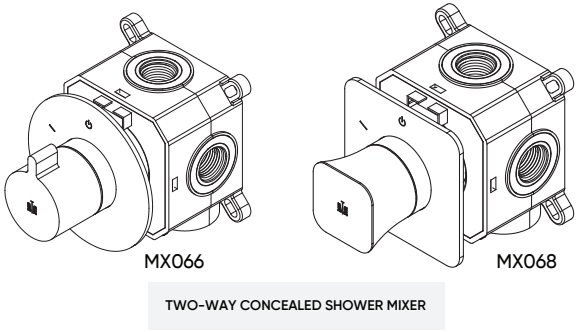

PARTS CHECKLIST


TWO-WAY CONCEALED SHOWER MIXER

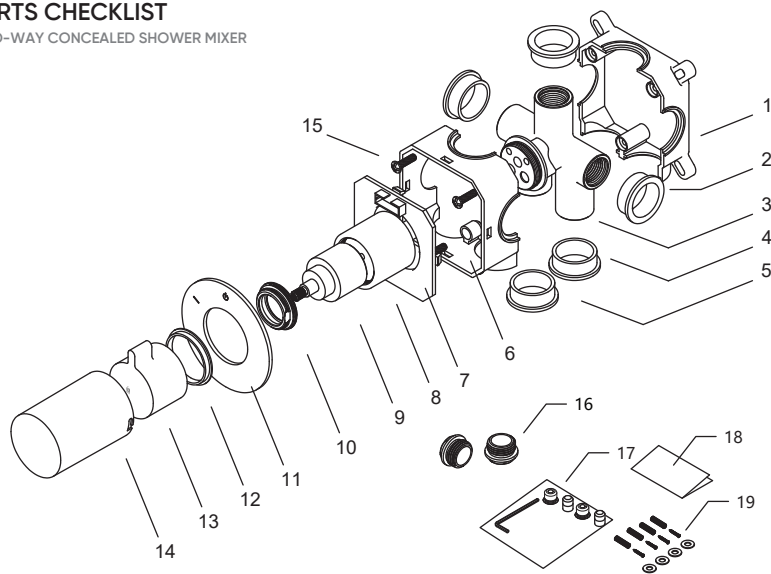

No.	Name	Qty
1	Concealed box base	1
2	Rubber seal for thread	3
3	Main body	1
4	Rubber seal for cold water line	1
5	Rubber seal for hot water line	1
6	Concealed box middle part	1
7	Concealed box cover	1
8	Sleeve for cartridge	1
9	Ceramic cartridge	1
10	Ceramic cartridge nut	1
11	Frame	1
12	Wearing ring	1
13	Handle	1
14	Protective cover	1
15	Fixing screw for the box	4
16	Brass closer for threads	2
17	Accessories	1
18	Installation manual	1
19	Other accessories	1




PARTS CHECKLIST

DIVERTER


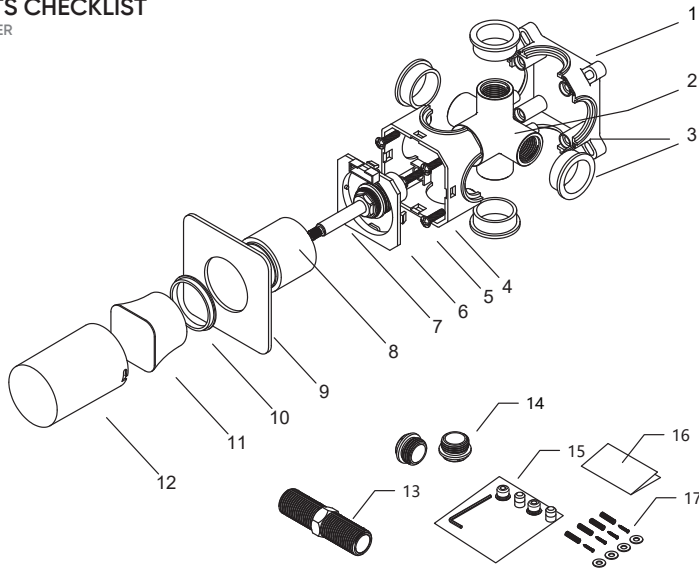


No.	Name	Qty
1	Concealed box base	1
2	Main body	1
3	Rubber seal for thread	4
4	Concealed box middle part	1
5	Fixing screw for the box	4
6	Concealed box cover	1
7	Brass cartridge	1
8	Sleeve for cartridge	1
9	Frame	1
10	Wearing ring	1
11	Handle	1
12	Protective cover	1
13	Connector for diverters	1
14	Brass closer for threads	2
15	Accessories	1
16	Installation manual	1
17	Other accessories	1

SAMPLE MODEL INSTALLATION SET

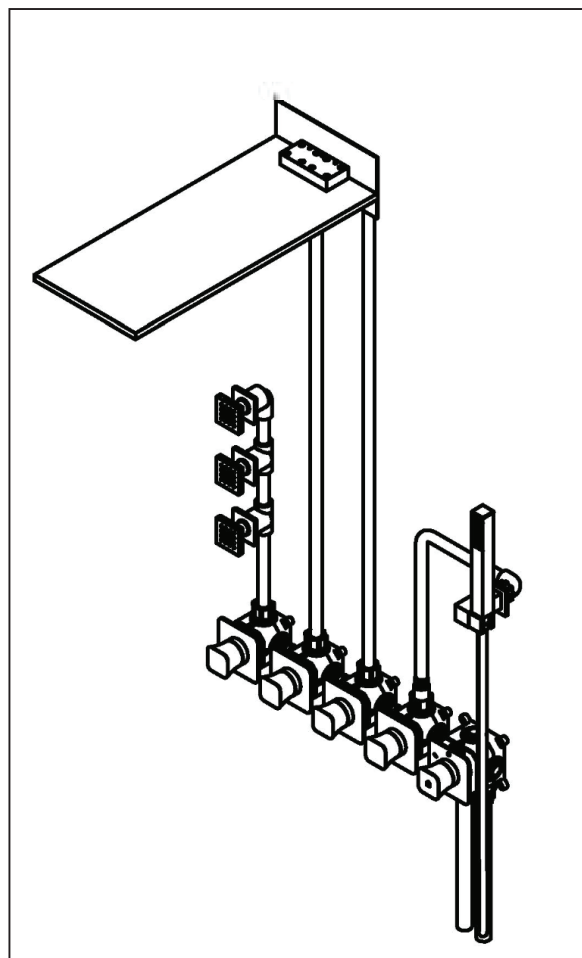
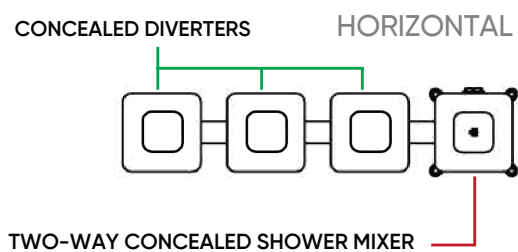
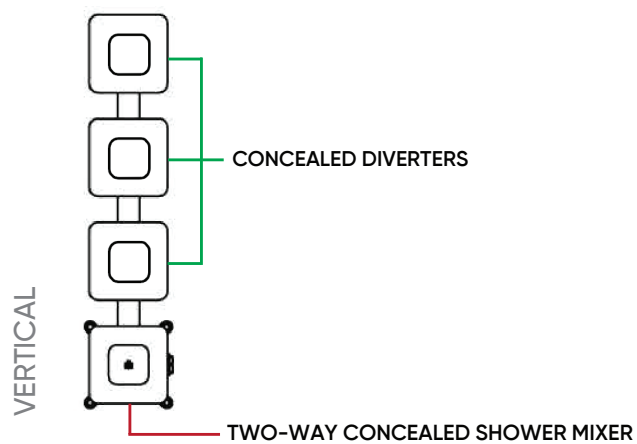


SUGGESTED SIZES

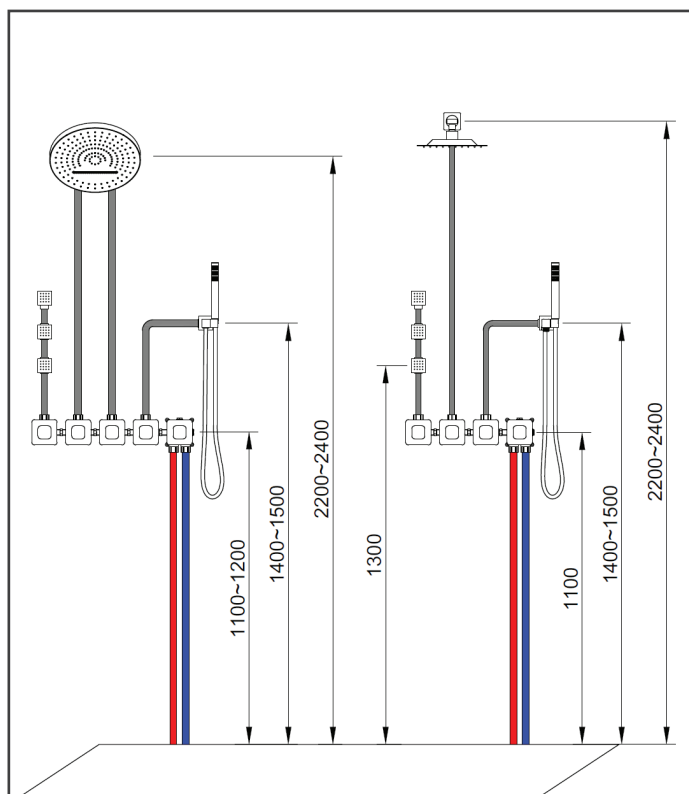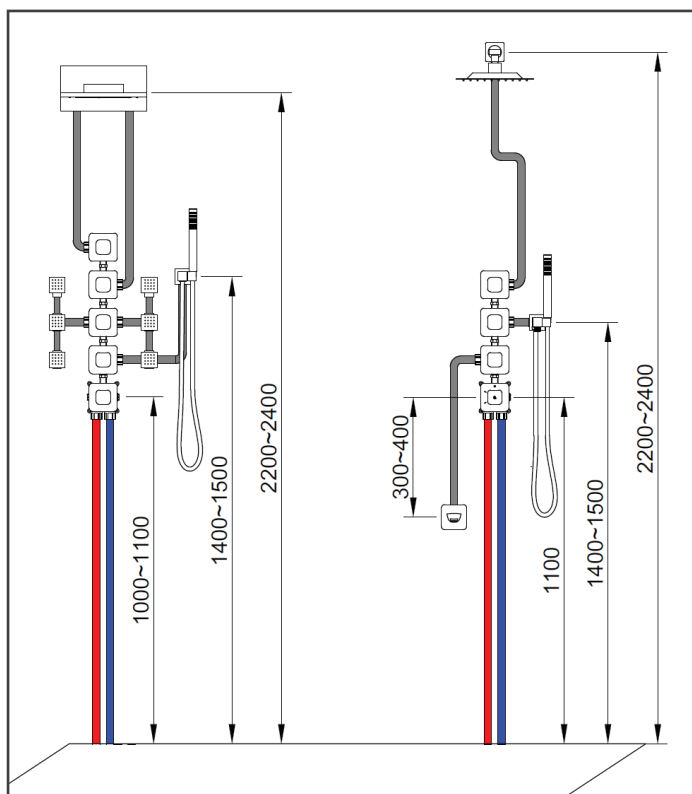

BASIC DIMENSIONS


Suggested hole size		
Category	Minimum length	Width
2 functions	340	110
3 functions	460	110
4 functions	580	110
5 functions	700	110

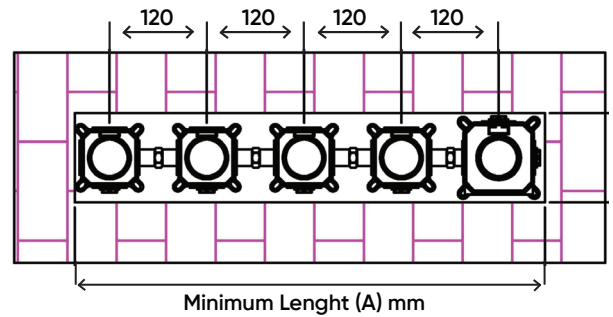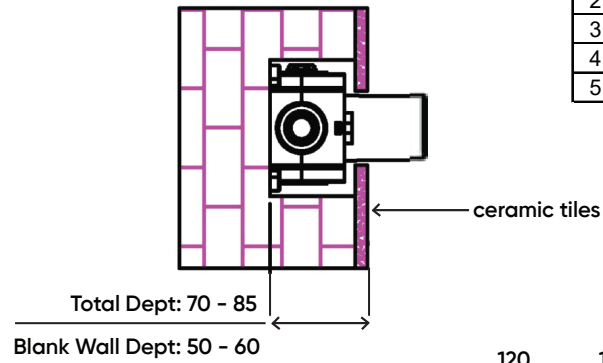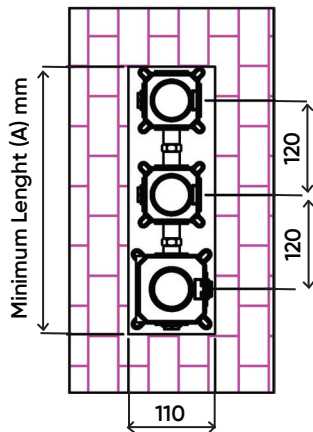

STEPS


1

Fix the threads with Teflon and be sure the distance between each diverter and main body is proper.

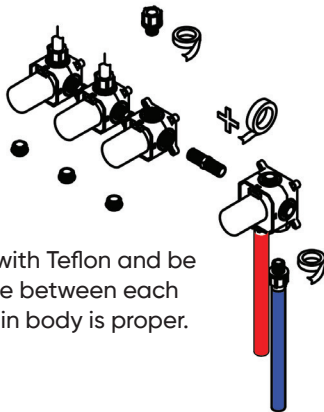

2

Connect each diverter and body with brass connectors by wrapping teflon, cut the wall according to the body size, mark the plastic wall plug position, level the box and fix the box with screws.


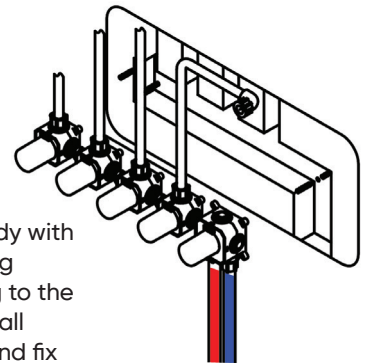


3

Use the brass switch to close all the water outlet connector.


Open cartridge to check if there no leakage from any outlet connector under 5 - 8 bar pressure.

Assemble the box cover and seal with cement.

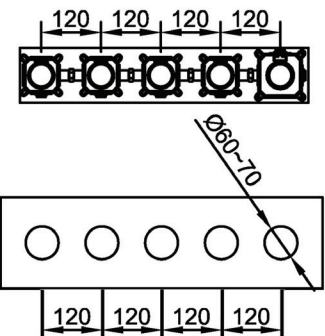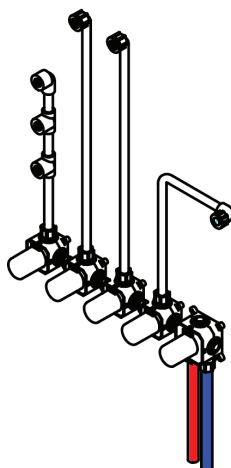


4

Tile holes according to the corresponding size

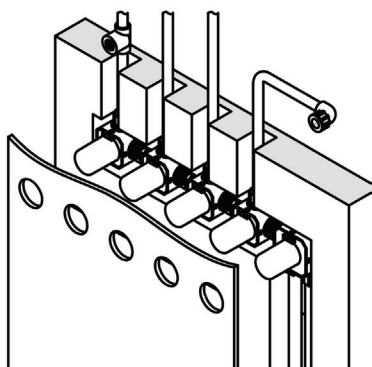

5

Paste the tiles with holes to match the body cover.

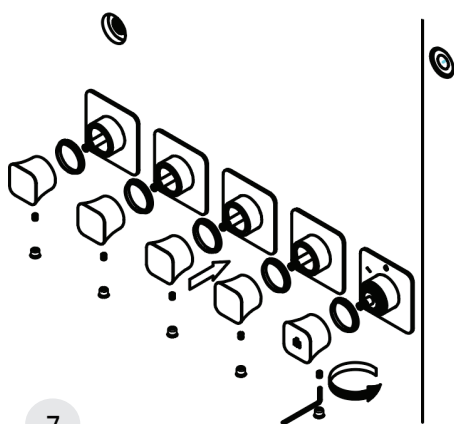


7

Screw the handle with the cartridges and fix the screw cover.


6

Open the plastic body cover and install the decorative frames, fix them after levelling.

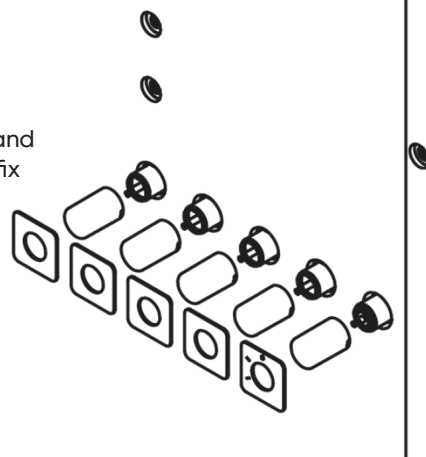

8



Complete the other surface parts for each function with teflon wrapped on the threads

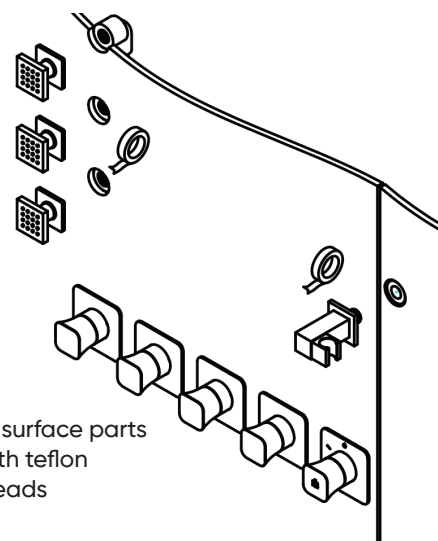

MAINTENANCE INSTRUCTIONS

To keep leading the surface bright and lively and good use performance, please click the following method nursing leader:

1. Rinse it with a soft cotton cloth to wipe dry only;
2. Can use mild liquid and colorless glass cleaner to remove surface dirt and scale membrane, not gear grinding effect of polishing agent;
3. Do not use abrasive cleansers, polish, emery cloth, paper towels or scraper, etc.;
4. Do not use acidic detergents, insoluble granular detergent, soap, etc.;
5. In use process, bubbler may accumulate dirt, make water decreases slowly, can open my bubble, rinse after bubbler, install back in place again can.



HATCH SANITARY

Hatch Sanitary is a trademark owned by MHG

Old Al Kharj Road, Building No. 3533
Riyadh 14511 - 8305
Kingdom of Saudi Arabia

© info.mhg@marketing-home.com

☎ 800 122 2230